

# 3M THG Series

## Top Hat Gland Kits with Cold Shrink Seals

### Application


3M™ Top Hat Glands are designed for use with Medium Voltage Cables in conjunction with Termination applications.

### Features

3M™ Top Hat Glands are made from galvanised steel and use 3M Cold Shrink Technology to seal onto the cable, eliminating the need for heat and special tools, making a quick, simple and reliable installation. The Cold Shrink Outer sealing tube provides a reliable environmental seal, and is resistant to acid, alkalis, ozone, fungus, and UV light.

### Kit Content

- Top Hat Gland
- Fixing Screws
- Jubilee Clips
- Cold Shrink Sealing tube
- Insulation & sealing tapes
- Full Installation Instructions

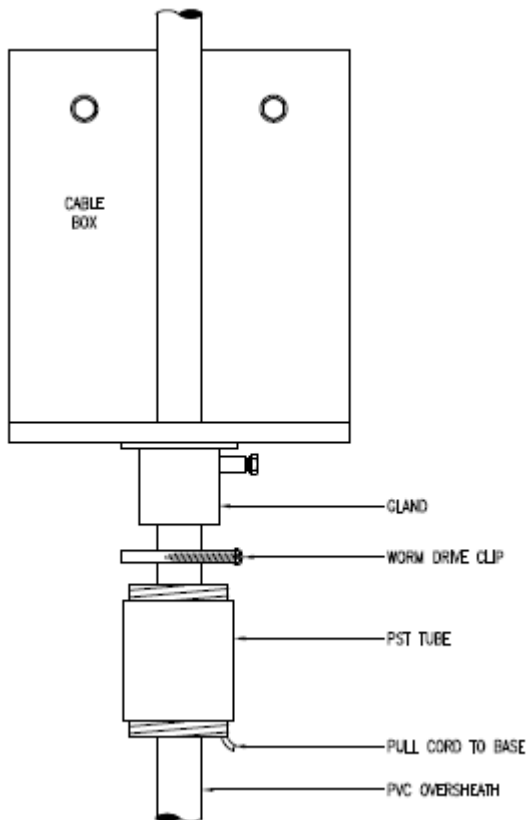

## Product Selection

Kit Reference	Accepted Cable OD (mm)
Top Hat Gland Kit Complete with Cold Shrink Sealing Kit	
<b>THG1</b>	36 – 65
<b>THG2</b>	53 – 94
Cold Shrink Replacement Sealing Kit	
<b>THGS1</b>	36 – 65
<b>THGS2</b>	53 - 94

## Shelf Life

3M Cold Shrink Tubes and Insulation tapes have a 5 year shelf life from date of manufacture when stored at the recommended temperature of 10-27°C at <75% Relative Humidity.

## Material Properties

Please refer to the individual technical data sheets for EPDM Rubber Cold Shrink Tubes for details of Electrical properties and other data.

## Product Stewardship

3M has a fundamental concern for all who make, distribute and use its products, and for the environment in which we live. This concern is the basis of our philosophy and policies by which we assess the health and environmental information on our products and then take the appropriate steps to protect employee, the public health and the environment.

## Customer Notice

3M encourages its customers and potential users of 3M products to review their applications for such products from the standpoint of human health and environmental quality. To help ensure that 3M products are not used in ways for which they were not intended or tested. 3M personnel are available to assist customers in dealing with ecological and product safety considerations. Your 3M sales representative can arrange for the proper contacts.

3M and Scotchcast are trademarks of 3M Company

### Important Notice

All statements, technical information and recommendations related to the Seller's products are based on information believed to be reliable, but the accuracy or completeness thereof is not guaranteed. Before utilizing the product, the user should determine the suitability of the product for its intended use. The user assumes all risks and liability whatsoever in connection with such use.

Any statements or recommendations of the Seller which are not contained in the Seller's current publications shall have no force or effect unless contained in an agreement signed by an authorized office of the Seller.

The statements contained herein are made in lieu of all warranties, expressed or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose which warranties are hereby expressly disclaimed. SELLER SHALL NOT BE LIABLE TO THE USER OR ANY OTHER PERSON UNDER ANY LEGAL THEORY; INCLUDING BUT NOT LIMITED TO NEGLIGENCE OR STRICT LIABILITY; FOR ANY INJURY OR FOR ANY DIRECT; INDIRECT; INCIDENTAL OR CONSEQUENTIAL DAMAGES SUSTAINED OR INCURRED BY REASON OF THE USE OF ANY OF THE SELLER'S PRODUCTS.

### Electrical Markets Division

#### 3M United Kingdom PLC

##### Sales Office

PO Box 393  
Bedford MK41 0YE  
Telephone: 0870 609 4639  
Fax: 01234 229 433

#### 3M Ireland Ltd

##### Sales Office

The Iveagh Building, The Park,  
Carrickmines, Dublin 18, Ireland  
Telephone: (01) 800 812 732  
Fax: 353 1 280 3509

#### 3M United Kingdom PLC

##### Head Office

3M Centre, Cain Road  
Bracknell, Berkshire RG12 8HT  
Telephone: 01344 858 000  
Fax: 01344 858 758